


## UNINTERRUPTIBLE POWER SYSTEM (UPS)

6KVA, 5.0KW Double Conversion, On-Line, Isolated 440V 3-Ph. Delta Input, 60Hz Input UPS with 440V 3-Ph, 60Hz Output UPS.

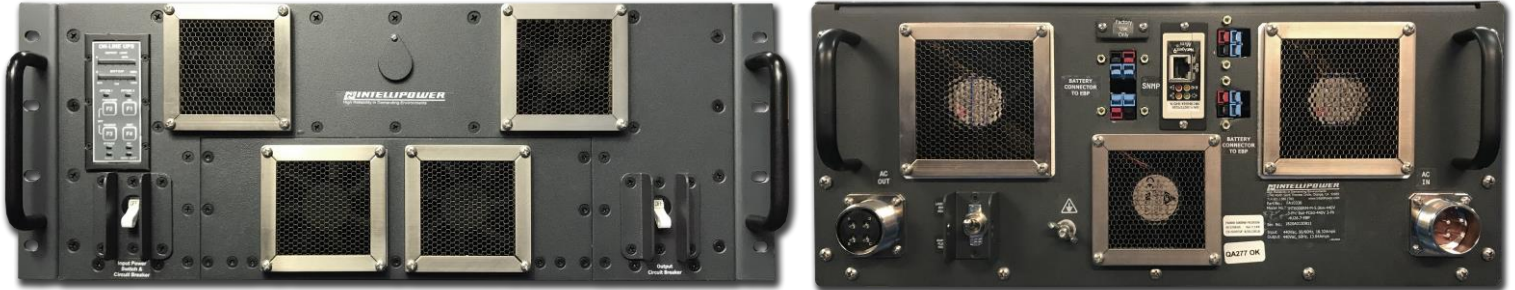

Part # FA10336

Model # IHT6000RM-M-5.0kw-440V 3-Ph.-Isol-FC60-440V 3-Ph -4U26.7-EBP

## FEATURES AND BENEFITS

### Rugged & Extreme Environments

All AMETEK IntelliPower systems utilize circuit boards, chassis and components that are **specifically designed for extreme environments**. In today's marketplace, repackaged commercial products are often billed as "rugged" and/or "built for harsh environments". Each component in our systems is specifically selected or designed based upon proven performance in harsh indoor and outdoor applications.

### Cutting Edge Technology

Our digital, double conversion on-line UPS, power conditioner and frequency/voltage converter solutions utilize high-efficiency power switching and galvanic isolation which provides **ideal electrical output performance**. Systems are available with global voltage inputs & outputs, AC inputs & outputs and DC inputs & outputs. You will be able to utilize any power source.

AMETEK IntelliPower offers power management software along with many standard communications protocols such as SNMP with OID and MIB Support, RS-232, Ethernet/IP – Common Industrial Protocol (CIP), MODBUS and Dry/Discrete Contacts. The sum total of these technological features equals the ultimate protection for your electronic equipment.

### Robust Product Portfolio

No other UPS company offers **2,000+ variations**. Utilizing AMETEK IntelliPower's building block methodology, more product features and functionality are provided; without having to extend lead times or change proven designs. For over 30 years, AMETEK IntelliPower has developed its electronics hardware, firmware, embedded software and enclosure technology in house, which provides us with a unique capability to meet virtually any of your application requirements to include completely sealed systems.

### Designed and Manufactured in the USA

The engineering and technological expertise within AMETEK IntelliPower has enabled us to develop and field test products since 1988 to **100% user satisfaction**. For you, this translates into shorter lead times from design to shipping as well as personalized service and support. Our mission is to provide you with the highest standard of customer support and quality control.

### Military Standards Compliance

All product configurations are designed and manufactured to **meet military standards**. Systems have been and can also be certified by independent labs. Many standards are met in our standard build practices, some notable standards include MIL-STD-461F (Electromagnetic Interference EMI), MIL-STD-464C (Electromagnetic Environmental Effects EME), MIL-STD-1275D (DC Electrical Power Systems), MIL-STD-901D (Shock), MIL-STD-167-A (Vibration), MIL-STD-810G (Environmental; Altitude, Temperature, Humidity, Fungus, Sand & Dust, Rain), and MIL-STD-1399-300B (Interface requirements for AC devices; Voltage Transients (spikes), Frequency Transients, Harmonics, Power Factor). AMETEK IntelliPower products are used in a wide range of key military programs within the Army, Air Force, Navy and Marines.

To find out more about AMETEK IntelliPower capabilities, please visit our website at [www.intellipower.com/capabilities](http://www.intellipower.com/capabilities).

### CORPORATE HEADQUARTERS

1746 N. Saint Thomas Circle Orange, CA 92865 USA  
 Tel: 714-921-1580 Fax: 714-921-4023  
 Email: [ca-ora-sales@ametek.com](mailto:ca-ora-sales@ametek.com) [www.intellipower.com](http://www.intellipower.com)

TAA Compliant. All products designed and manufactured in the USA.  
 9001:2015 ISO Certified Facility  
 Military Standards



Uninterruptible Power System (UPS)	
IP Part #:	FA10336
IP Model #:	IHT6000RM-M-5.0kw-440V 3-Ph.-Isol-FC60-440V 3-Ph -4U26.7-EBP
IP Description:	6KVA, 5.0KW Double Conversion, On-Line, Isolated 440V 3-Ph. Delta Input, 60Hz Input UPS with 440V 3-Ph, 60Hz Output UPS.
SPECIFICATIONS	
Power Rating (VA, Watts):	6000 VA, 5000 W
Input AC Voltage (AC Voltage, tolerance):	440V, 3-Ph, 60Hz (-10% +15%)
Input DC Voltage (DC Voltage, tolerance):	N/A
Input Frequency (Hz, tolerance):	47 to 63 Hz
Input Max Current (Amps):	17.9A
Output AC Voltage (AC Voltage, tolerance):	440 VAC, 3-Ph (±4%)
Output DC Voltage (DC Voltage, tolerance):	N/A
Output Frequency (Hz, follower/changer):	60Hz (±0.3 Hz), Changer
Enclosure Type & Size (type/rack unit, dimensions):	Rack Mountable 4U, 7"H x 17" W x 26.7" D
Enclosure Material & Finish (aluminum/steel, finish):	Aluminum
Enclosure Airflow (front to rear/front to side/other):	Front-to-rear
Connector(s) AC Input (type, location):	MS3450/L20-4P or equivalent(1900144), rear panel
Connector(s) DC Input (type, location):	N/A
Connector(s) AC Output (type, location):	MS3450/L20-4S or equivalent (1900644), rear panel
Connector(s) DC Output (type, location):	N/A
Connector(s) EBP/Charger (type, location):	2 x 2 Locking Anderson, 4 required, Rear Panel
Battery Type (rating, PbAcid/Pure PbAcid/Lithium Iron):	LiFePO4
Battery Total Quantity:	No Internal Batteries
Battery String Voltage:	128 VDC
Battery String (number of strings, quantity per string)	2 Strings, 10 per string in EBM P/N FA10339
Battery Minimum Run Time (approx. run time at #watts):	30 minutes at 5000 W
Battery Mounting (hot swap/fixed):	44.64 Amps
Temperature:	-20°C to +50°C Operating
Humidity:	0-95%, Non-Condensing
PFC Feature:	Yes
Isolation (galvanic isolation/non-isolated):	Galvanic Isolation
Application (shipboard/airborne/ground/all):	Shipboard or Ground
Fan Filters (EMI/dust/comboination/grill):	EMI
Auto Start (manual start/auto start):	Auto Start
Cold Start Switch (yes/no):	Yes
Overload – Shutdown or Bypass (shutdown/bypass, %):	Shutdown at 10% Overload
Conformal Coated PCBAs (yes/no):	Yes
Communications (SNMP2/SNMP3/RS232, type):	SNMP v3.3
Breaker & Switch Input (type, location):	3-Ph 15A, Breaker & Toggle Switch, Front Panel
Breaker & Switch AC Output (type, location):	3-Ph 10A, Breaker & Toggle Switch, Front Panel
Neutral Bonded to Ground (bonded/un-bonded/switch):	Toggle Switch, Rear Panel

ISO 9001:2015 Certified Facility | TAA Compliant | Military Standards

**CORPORATE HEADQUARTERS**

1746 N. Saint Thomas Circle Orange, CA 92865 USA  
 Tel: 714-921-1580 Fax: 714-921-4023  
 Email: ca-ora-sales@ametek.com www.intellipower.com

TAA Compliant. All products designed and manufactured in the USA.  
 9001:2015 ISO Certified Facility  
 Military Standards

